

May 2004

To: Infinity Service Centers

Models: TSS-750 Satellites

Subject: How to Disassemble the Satellite Loudspeakers

To disassemble the satellites, a small hook or dental pick is necessary (see *Picture 1*)
The hook can be used to take the front grille off, and then to remove the front baffle.

To remove the front baffle, place the hook in the small hole in the corner next to the woofer as on *Picture 2* and pull out so the small hook pulls the tabs on front baffle loose from the cabinet. See *Picture 4* to locate the tabs. It is easiest to start with the corners next to the woofer, as there may be glue around the tweeter that makes it more difficult to start on that end.

Picture 3 shows the satellite when it is disassembled




Picture 1



Picture 2



Picture 3

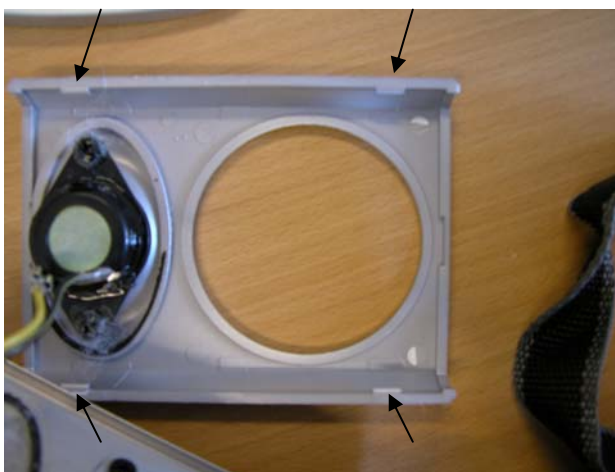

Picture 4

Model	Serial number	Status	Action
TSS-750 SAT	All		Repair